

MONKEY FAN 120 mm / 5 inch



Easiest way to ensure an even air circulation inside your grow tent.


These fans are designed to clip quickly on 16 to 19mm poles (0,63 to 0,75 inch). Enjoy low noise and extended lifetime thanks to the brushless DC 24V motor. The small size of these fans allows you to optimize your grow area. Use them 15° upward or downward to blow air from over or under of the canopy. Available in packs of 1, or 2 pieces depending on your grow area.

| REFERENCE | DESIGNATION METRIC | DESIGNATION IMPERIAL | RECOMMENDED GROW AREA |
|----------------|--------------------|----------------------|------------------------|
| MF120 | Monkey Fan 120 mm | Monkey Fan 5 inch | Up to 60x60cm / 2x2 ft |
| MF2X120 | Monkey Fan 2x120mm | Monkey Fan 2x5 inch | Up to 90x90cm / 3x3 ft |



GENERAL DETAILS

| | |
|-------------------------|--|
| Application | Grow tent, grow room, vertical farming |
| Plant grow stage | Mother plants, growing, blooming |
| Motor technology | Ball Bearing EC low consumption engine |

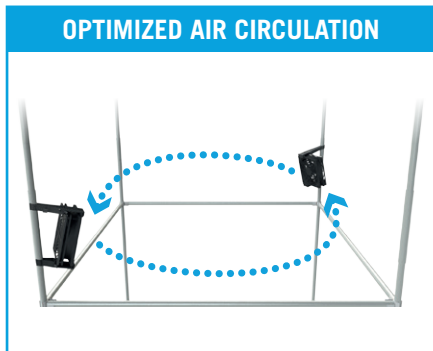

100% safe
24V





Low Consumption
High energy efficiency



Ultra Compact
Design



Long Life
30 000 h

| REF | MF120 | MF2X120 |
|---------------------------------------|---|--|
| |  |  x2 |
| WEIGHT | 0.3 kg / 0.7 lb | 0.6 kg / 1,3 lb |
| DIMENSIONS ASSEMBLED (ONE FAN) | | |
| Length | 120 mm / 4,7 inch | 120 mm / 4,7 inch |
| Width | 125 mm / 4,9 inch | 125 mm / 4,9 inch |
| Height | 142 mm / 5,6 inch | 142 mm / 5,6 inch |
| TUBE CLIP DIAMETER | 16-19 mm / 0,63-0,75 inch | 16-19 mm / 0,63-0,75 inch |
| AIRFLOW MAX | 107 m³/h / 63 cfm | 2x107 m³/h / 2x63 cfm |
| POWER | | |
| Consumption | 1.5 W | 2.85 W |
| Voltage | 100-240 V | 100-240 V |
| Frequency | 50/60 Hz | 50/60 Hz |
| Cable Length 24V | 180 cm / 71 inch | 60 cm + 270 cm splitter 2x / 24 inch + 106 inch splitter 2x |
| ADAPTERS INCLUDED | | |
| Type | C/G/A Type | C/G/A Type |
| Country | UE/UK/US | UE/UK/US |
| MOTOR | | |
| Type | Brushless DC | Brushless DC |
| Voltage | 24 V | 24V |
| Current | 40 mA | 2x40 mA |
| Speed | 1900 RPM | 1900 RPM |
| NOISE* | Max <30 dB (A) | Max 32 dB (A) |
| LIFETIME | 30 000 hours | 30 000 hours |
| TEMPERATURE | | |
| Working | 15 to 35 °C / 60 to 95 °F | 15 to 35 °C / 60 to 95 °F |
| Storing | 0 to 50 °C / 30 to 120 °F | 0 to 50 °C / 30 to 120 °F |

* Measured in SJ standard : 70cm from the front of the tent (closed), at 100cm height